




Model 400

Barrier free, center drain Terrazzo Shower Receptors with reduced threshold height.

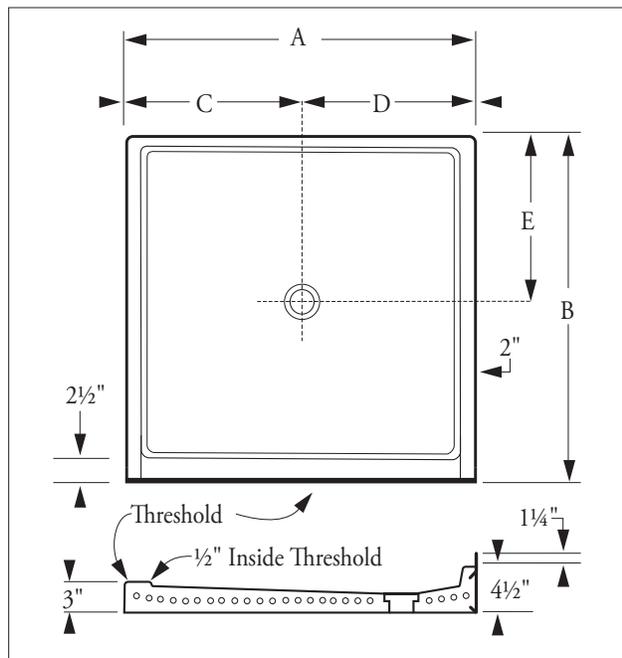

A*	B	C	D	E	WT
36"	36"	18"	18"	18"	315
✓ 40"	38"	20"	20"	19"	370
42"	42"	21"	21"	21"	381
42"	36"	21"	21"	18"	365
48"	36"	24"	24"	18"	445
48"	48"	24"	24"	24"	550
60"	32"	30"	30"	16"	435
60"	36"	30"	30"	18"	500
✓ 63"	33"	31 1/2"	31 1/2"	16 1/2"	500

*Width of threshold (other sizes available upon request)

✓ Conforms to ADA Requirements

**Dimensions subject to change without notice.
Contact Florestone Products to verify product specifications.**

Florestone Model 400 Barrier-Free Terrazzo- Shower Receptors



Some Models Conform to
ADA REQUIREMENTS*

Architect's Specifications

Furnish and install wheelchair accessible Terrazzo Shower Receptor Model 400 as manufactured by Florestone Products Company. Flanges on three sides, cast integral, shall be of galvanized-bonderized steel and shall extend not less than 1" above the shoulders. Shoulders on three sides shall be not less than 2 1/2" inside. Threshold shall be not more than 1/2" above receptor floor to allow for barrier free entrance. Drain body shall be brass, cast integral, and shall provide for a non-caulked connection not less than one inch deep to a 2" pipe. Removable type stainless steel strainer plate shall be supplied. Receptor shall be manufactured of tan and white marble chips cast in white Portland cement to produce a compressive strength of not less than 3,000 PSI, seven days after casting. Terrazzo surface shall be ground, polished, and the entire unit sealed to resist stains and moisture. Receptors reinforced with 16-gauge wire.

Options

Offset drain.
Additional flanges.
(Drawings required)

Note: Terrazzo is not designed to be used with anything that is over 130 degrees Fahrenheit.

 **FLORESTONE**
A Spec Above.™

FLORESTONE PRODUCTS CO., INC.

2851 Falcon Drive • Madera, CA 93637

T. 559.661.4171 • T. 800.446.8827

F. 559.661.2070 • florestone.com